



PRODUCT BROCHURE · HAIER BIOMEDICAL

150°C Cryo FreezerDW 150W209 11.29 final

2 models inside · Cold Storage · Cryo Freezers



QUICK VIEW — SERIES AT A GLANCE

2 models in this document from Haier Biomedical. Full specifications inside.

MODELS IN THIS DOCUMENT

DW-150W209A-11 208~230V
5V · DW-150W209

TEMPERATURE RANGE SIZE / CAPACITY
-140°C to -150°C 7.4 Cu. Ft. / 210L

STYLE SHIP WEIGHT
Chest 820 lb

Distributed by Legacy Lab Supplies

legacylabsupplies.com · (855) 746-7557 / 855-SHOP-LLS · quotes in 24 hours



-150°C **Cryo Freezer** **DW-150W209**



Scope of Application :

This product is suitable for the ultra low temperature storage of products in applications such as clinical, pharmaceutical, scientific research, and epidemic institutions. It also can be used in blood stations, hospitals, centers for disease control, science and research institutions, electronic and chemical laboratories, biomedical engineering institutions, and pelagic fishery companies to store red blood cells, viruses, germs, skin, bones, bacteria, sperm, biological products, electronic components, and low temperature testing samples of special products as key examples.

Innovative Design

- Hydrocarbon energy saving
- Safe and reliable
- Intelligent control
- Low noise

Qingdao Haier Biomedical Co.,Ltd.

No.280 Feng Yuan Road, High-tech Zone,
Qingdao, 266109, P.R. China
Tel: +86-0532-88935593
E-mail: inquiry@haierbiomedical.com
Website: www.haiermedical.com



Haier Biomedical
International



Haier Biomedical
International



@haiermedicalint



Haier Biomedical
International



Haier Biomedical
International

Product Advantages



Hydrocarbon energy saving

- Imported brand compressor, hydrocarbon refrigerant, dual-compressors 4-stage cascade refrigeration system, high efficiency and energy saving
- Imported brand efficient fan, intelligent start and stop



Environmentally friendly

- HC refrigerant, truly fully environmentally friendly refrigeration system, GWP=0
- LBA polyurethane foam, environmental protection



Superior Uniformity

The temperature is more uniform, set -150°C, the difference between the highest temperature and the lowest temperature in the box is less than 10°C



Safe, Secure and Reliable

The standard ambient temperature ranges from 10°C to 32°C. The pressure state of the system can be automatically adjusted by the pressure controller to prevent the pressure from being too high to effect the freezer operation. Multiple alarms, including high and low temperature, power failure, door ajar, hot condenser, low battery, sensor error, and high ambient temperature.



Low noise

Optimized system and structure noise reduction design, the noise 55 dB (A)

Functional Details


Integrated stainless steel hinge

Door opening angle > 45° can stop
One 25mm diameter test hole






Ergonomic design

LCD screen operation plane
slope 8°




Electric control function

Standard USB. Optional fingerprint lock,
NFC card lock

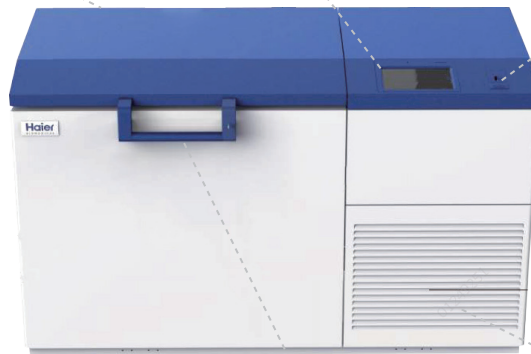

Adjustable foot

Large adjustable feet,
easy to level



Integrated handle

Cast aluminum handle, handle and box
spacing > 45mm, easy to grasp



Magnetic front cover

Screwless design, easy to remove and
clean the filter



Product Details

• Microprocessor controller

Equipped with a microprocessor controller and a 10.1 inch LCD screen with display accuracy at 0.1°C to show the cabinet and ambient temperature, voltage and other data clearly. The temperature inside the cabinet is adjustable from -130°C to -150°C.

• Safe and secure

Integrated handle, standard equipped with key lock and padlock, with optional electromagnetic lock and fingerprint lock, providing multiple safeguards for sample safety.

• Large capacity USB

Enables users to download historical temperature data of the past 10 years for compliance and auditing purposes.

• Backup power, extended standby

Equipped as standard with two (2) lithium batteries which allows extended information/data availability, even after power cutoff.

• Multiple alarms

With high and low temperature alarm, sensor error, hot condenser, power failure, low battery, door ajar, high ambient temperature and other alarm functions.

• Superior insulation performance

Wide cabinet opening design, outer door multi-layer sealing, standard with two inner doors, to prevent the loss of cold; Cabinet VIP+ polyurethane foam 140mm.

• Compatible with freezer racks design

The height of the inner is increased, which can be compatible with various kinds of freezer racks.


• Networking functions

A standard RS485 port is configured for multiple refrigerators.

• Anti-condensation design

Built-in cabinet heating wire can quickly eliminate the cabinet opening condensation.

Product Dimension Drawings

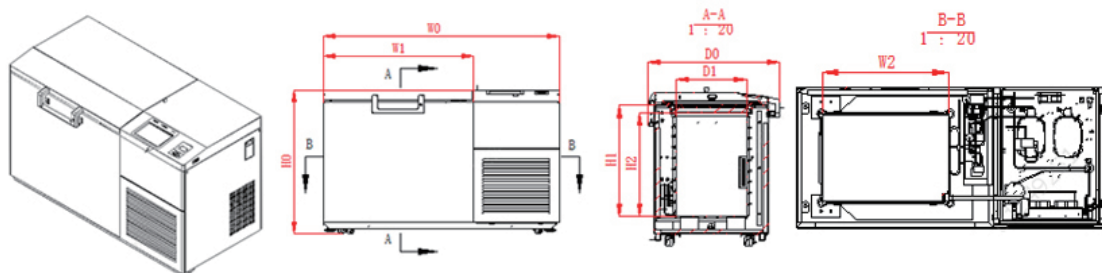

Remark
W0-Total Width
W1-Cabinet Width
W2-Inner Cabinet Width
D0-Total Depth
D1-Inner Cabinet Depth
H0-Total Height
H1-Cabinet Height
H2-Inner Cabinet Height

Model	Code	W0	W1	W2	H0	H1	H2	D0	D1
DW-150W209		1650mm	1050mm	667mm	1008mm	727mm	677mm	865mm	462mm

Specifications



Model	DW-150W209		
Technical Data	Cabinet type		Chest
	Climate class		N
	Cooling type		Direct cooling
	Defrost mode		Manual
	Refrigerant		HC
	Sound level (dB(A))		55
Performance	Cooling performance (°C)		-150
	Temperature range (°C)		-130 ~ -150
Control	Controller		Microprocessor
	Display		LCD
Electrical Data	Power supply (V/Hz)		220~240/50
	Power (W)		1600
	Max power draw (W)		1750
	Electrical current (A)		10
	Capacity (L/Cu.Ft)		209/7.4
Dimensions	Net/gross weight (approx)	kg	260/295
		lbs	573.2/650.4
	Interior dimensions (W*D*H)	mm	667*462*677
		in	26.3*18.2*26.7
	Exterior dimensions (W*D*H)	mm	1650*850*1010
		in	65.7*33.5*39.8
	Packing dimensions (W*D*H)	mm	1810*940*1190
		in	71.3*37.0*46.9
	Container load (20'/40'/40'H)		6/13/13
Functions	High/Low temperature		Y
	Hot condenser		Y
	Power failure		Y
	High/Low voltage		Y
	Sensor error		Y
	Low battery		Y
	High ambient temperature		Y
	Door ajar		Y
	Start-up delay		Y
Accessories	Caster		Y
	Foot		Y
	Porthole		Y/1
	Inner doors		-/2
	USB interface		Y
	Remote alarm		Y
	5V power supply port		Y
	Temperature chart recorder		Optional
	RS485 port		Y
	LN2 backup system		Optional
Certification	CE		Y