



DW-25L92

-25°C Biomedical Freezer



Hydrocarbon Energy-saving

DW-25L92 adopts an efficient hydrocarbon (HC) compressor and optimized refrigeration system, to give a power consumption of just 0.65KW·h/24h.



Environmentally Friendly

The HC system is a completely green refrigeration solution. With LBA foamed polyurethane insulation in line with European ROHS directive for environmentally friendly materials.



Low Noise

Optimized hydrocarbon system and structural noise reduction design, DW-25L92 noise 27 dB, super quiet and low noise.



Security Lock

Mechanical lock plus lock catch, the mechanical door lock can be opened with one key, and the door lock can be padlocked. Secure and safe, suitable for multiple users.

Qingdao Haier Biomedical Co.,Ltd.

No.280 Feng Yuan Road, High-tech Zone,
Qingdao, 266109, P.R. China
E-mail: inquiry@haierbiomedical.com
Website: www.haiermedical.com



Haier Biomedical
International



Haier Biomedical
International



@haiermedicalint



Haier Biomedical
International



Haier Biomedical
International

Product Features



Microprocessor

- Microprocessor electronic temperature controller, LCD digital temperature display, display precision is 0.1°C, temperature set point -10~-25°C. Temperature uniformity is $\pm 3^{\circ}\text{C}$.
- Multiple alarms including high and low temperature, sensor error, power failure, door ajar, high ambient and remote alarm.
- Alarm mode: sound and light alarm.
- It can be connected to remote alarm.



Undercounter Biomedical Freezer

The DW-25L92 cabinet is designed with a height of 810mm, which can be easily placed under the bench to save storage space.




Porthole

There is a standard access port (25mm inside diameter) on the left side of the unit, which is convenient for users to test independently.



Multiple Interface Options

- Standard configuration: Remote alarm interface.
- Optional configuration: USB or RS485.

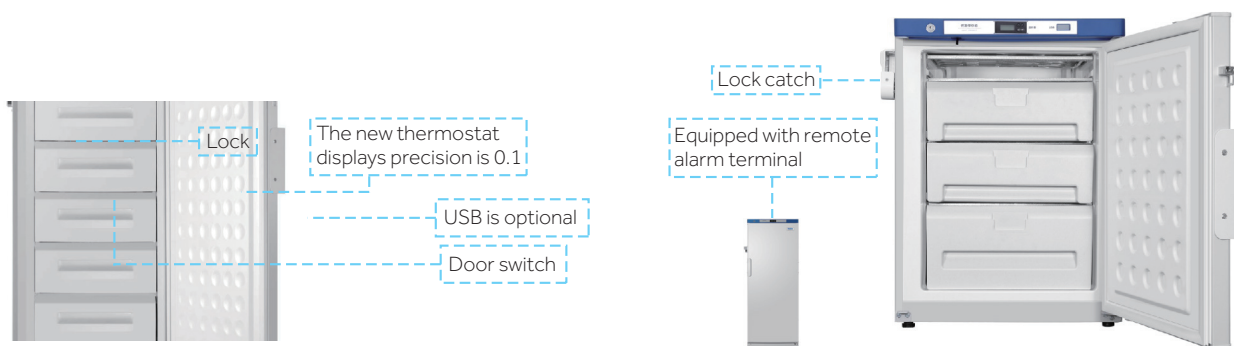

CODE		Key							
MODEL	W0	W1	W2	W3	D0	D1	D2	H0	H1
DW-25L92	640mm	597mm	435mm	410mm	610mm	410mm	294mm	810mm	635mm



Specifications



Model			DW-25L92	
Technical Data	Cabinet Type		Upright	
	Climate Class		SN N	
	Cooling Type		Direct Cooling	
	Defrost Mode		Manual	
	Refrigerant		HC	
	Sound Level (dB(A))		27	28
Performance	Cooling Performance (°C)		-25	
	Temperature Range(°C)		-10~-25	
Control	Controller		Microprocessor	
	Display		LCD	
Electrical Data	Power Supply (V/Hz)		220~240/50	115/60
	Electrical Current (A)		1.2	1.8
Dimensions	Capacity (L/Cu.Ft)		92/3.2	
	Net/Gross Weight (approx)	(kg)	46/51	
		(lbs)	101.4/112.4	
	Interior Dimension (W*D*H)	(mm)	435*410*635	
		(in)	17.1*16.1*25.0	
	Exterior Dimension (W*D*H)	(mm)	640*610*810	
		(in)	25.2*24.0*31.9	
	Packing Dimension (W*D*H)	(mm)	660*700*910	
		(in)	26.0*27.6*35.8	
Alarms	Container Load (20'/40'/40'H)		48/102/102	
	High/Low Temperature		Y	
	Remote Alarm		Y	
	Power Failure		Y	
	Sensor Error		Y	
	Low Battery		N	
	High Ambient Temperature		Y	
	Dirty Condenser		N	
Accessories	Door Ajar		Y	
	Caster		Y	
	Leveling Feet		Y	
	Porthole		Y	
	Drawers/InnerDoors		3/N	
	Adjustable Shelves		N	
	USB Interface		Optional	
	RS485		Optional	
Other	NFC		N	
	Temperature Recorder		N	
	Certificate		CE	UL

*Haier Biomedical reserves the right to change products and specifications without prior notice.

