



PRODUCT BROCHURE · HAIER BIOMEDICAL

CO₂ Incubators 2024.10.18

6 models inside · Thermal Processing · Incubators & Ovens



QUICK VIEW — SERIES AT A GLANCE

6 models in this document from Haier Biomedical. Full specifications inside.

MODELS IN THIS DOCUMENT

TRAY-HCP · HCP-258B · ROLLER-80B ·
HCP-168B · HCP-80B · HEPA-HCP

SOURCING

Authorized U.S. distributor

SHIP WEIGHT

209 lb

Distributed by Legacy Lab Supplies

legacylabsupplies.com · (855) 746-7557 / 855-SHOP-LLS · quotes in 24 hours



CO₂ Incubators



Uniform and Stable Temperature



180°C Dry-Heat Sterilization



Precise CO₂ Concentration

Haier Biomedical USA

Website: www.haiermedical-usa.com

Haier Biomedical
Intelligent Protection of Life Science



Haier Biomedical
USA



Haier Biomedical
International



@haiermedicalint



Haier Biomedical
International



Haier Biomedical
International



HCP-80B

HCP-168B

HCP-258B

IR Sensitive Control of CO₂ Concentration


The new IR sensor with high temperature resistance of 190°C is based on the NDIR measurement principle and uses a silicon MEMS transmitter to replace the traditional light source. It can withstand more than 300 dry heat sterilization cycles with a service life of up to 15 years and control accuracy of $\pm 0.1\%$. German IR infrared sensing technology, zero drift, without need for calibration, drift less than 0.3% within 2 years



7-inch Touchscreen

Displays CO₂ concentration and temperature data in real time. 15 years of data can be exported via USB

6-sided heating sketch




304 Stainless Interior



Adjustable Feet

It can be double stacked

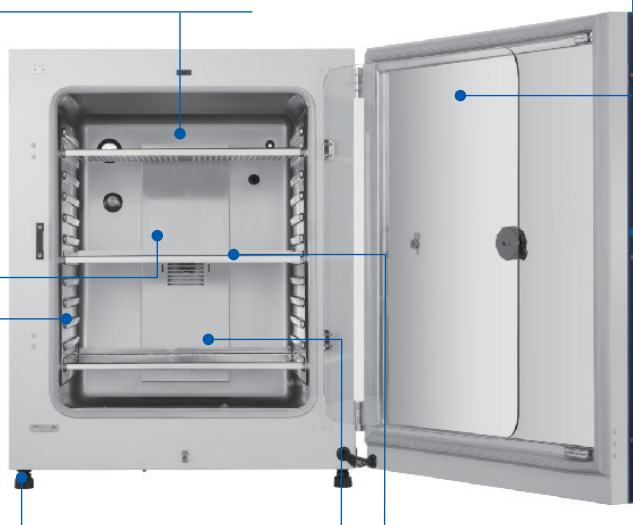

Inner Door

The door ensures the inside of the cabinet is sealed

Outer Door

The heated outer door prevents the condensation of the inner door

Internal Partition

Safety anti-slip design of pull out shelves




180°C Dry-heat Sterilization


All internal components do not need to be disassembled and do not need separate autoclave sterilization to prevent secondary pollution. Cleaning consumables are not needed, one-button sterilization. The unit can withstand sterilization at 180°C with no disassembly and no manual calibration

Precise and Accurate Temperature Control

Controls the temperature precisely, within $\pm 0.1^\circ\text{C}$, with six-sided heating based on the fuzzy PID control principle, to provide a stable temperature to ensure the normal growth of cells throughout their life cycle.

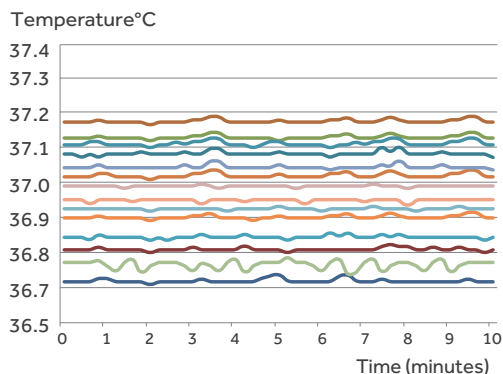


Uniformity of 27 measuring points $< \pm 0.3^\circ\text{C}$

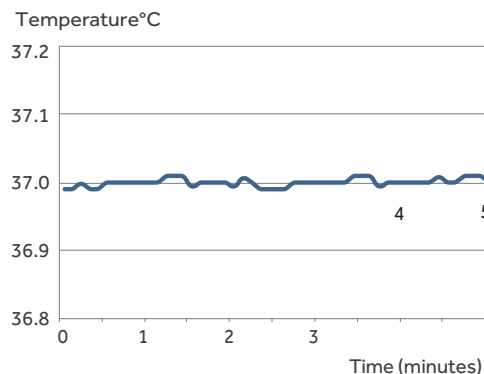


Central consistency point $< \pm 0.1^\circ\text{C}$

Precise CO₂ Concentration Using New IR Sensor Control Technology

Haier Biomedical's new IR Sensor technology uses NDIR measurement principles and withstands high temperatures of 190°C. The silicon MEMS transmitter can carry out more than 300 dry heat sterilization cycles to extend the service life to 15 years. Built-in temperature and humidity compensation technology reduces the impact of changes in humidity and temperature without the need for calibration after the high temperature sterilization. Five point calibration yields a higher measuring accuracy, sensitivity with less drift.



Silicon-based mems transmitter

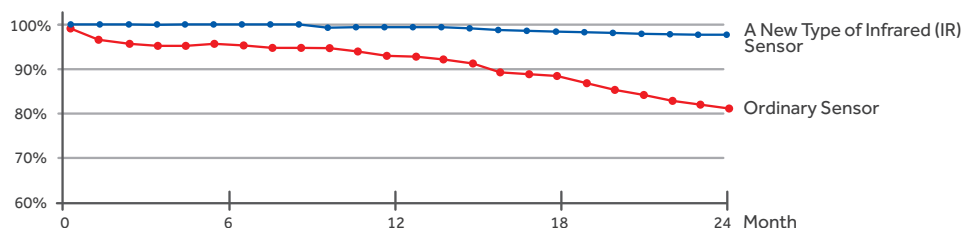

Sketch of drift less than 0.3%

Fast Environment Recovery for Optimal Cell Growth

Adopting active air flow control technology, and based on the fuzzy PID control principle, the parameters can be restored without overshoot. After opening the door for 30 seconds, the temperature and CO₂ concentration can be quickly restored within 4 minutes. Even if multiple users share a CO₂ incubator and frequently open and close the door, the stability and uniformity of the incubator can be ensured.






Illustration of purified airflow

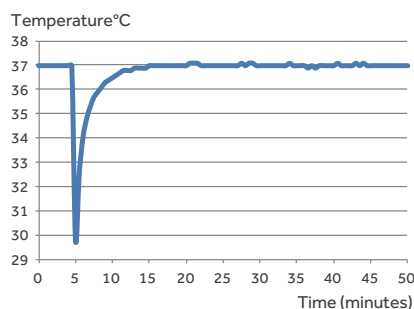

Temperature recovery curve (door open for 30s)

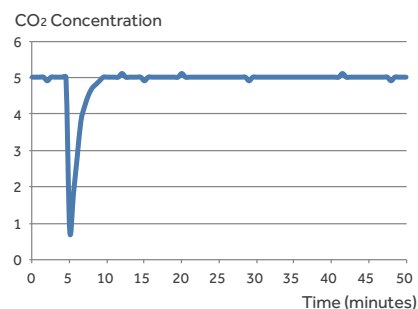


CO₂ concentration recovery curve (door open for 30s)

180°C Dry-Heat Sterilization Technology Minimises Contamination

Easy and effective sterilization of microorganisms including bacteria, fungi and microplasma with strong resistance, at 180°C high temperatures without the need for consumables. Simply press the "sterilization key" to activate and complete the sterilization process automatically in just 12 hours.

Delivers sterility level within the chamber of all surfaces to meet WS/T367-2012 standards.

All components are sterilized during the process, there is no need to disassemble internal components (including CO₂ sensors) and decontaminate separately, thus avoiding secondary pollution.

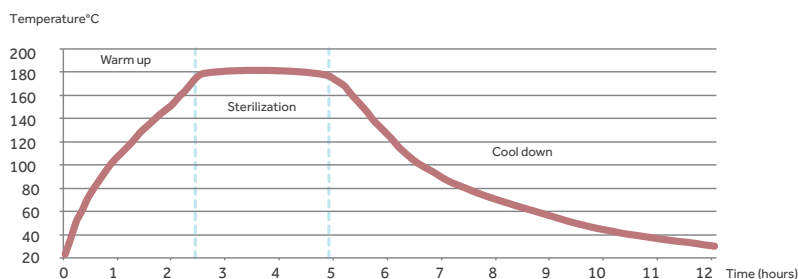


High Efficiency Microbial Filter



The CO₂ inlet is equipped with a high-efficiency microbial filter, with 99.99% filtration efficiency for particles larger than or equal to 0.2μm in diameter. It can effectively filter bacteria and dust particles in the CO₂ gas line to ensure the safety of experimental results.

Easy to Clean Interior




The working chamber is plasma electro polished, stamped stainless steel with wide-arc, laser welded corners. Bracketless shelving design ensures that it is quick and easy to clean.

Interactive Intelligent Display with Easy Touch Operation


Touch-sensitive screen with rapid sensing even in rubber gloves. Green indicates normal operational parameters, while a red warning display indicates abnormal, making it easy to view data at a glance. A red warning display and audible buzzer will alarm when water level is low.




Home screen red warning.



Real-time display of operation data & real-time display of temperature, for CO₂ concentration and O₂ concentration, and the data during the culture cycle can be viewed at any time.



Announcement function designed for multiple persons to use the same incubator making it clear to all users on important matters.



Operation mode clear management authority: three-levels of authority to ensure the security of data.

Anti-Condensation Heating System to Reduce Pollution Risk

The door on the CO₂ incubator radiates heat to the inner glass door, effectively preventing the glass door from forming condensation.

The possibility of microbial contamination caused by the condensate water is eliminated.

Intelligent Control of Circulating Air Maintains Uniformity

Automatically adjusts the circulation of the air flow, optimising the air flow to avoid air volatilization of samples and ensuring proper uniformity throughout the chamber.

Comprehensive Safety Alarm System

The system ensures the safety of experiments and processes by utilizing an independent temperature alarm system, including a sound light and remote reminder.

Other alarms include CO₂ concentration, door ajar and water shortage.


Innovative and User-Friendly Design with Attention to Detail



Safe anti-slip design with pull out shelves.



Drainage design




Active heat pipe condensation technology with any condensation directly returning to the reservoir.



Data traceable for 15 years with large storage capacity and data exportable through USB.

The Quality of ISO Class 5 Clean Room Can Ensure a Better Cell Growth Environment



The optional HEPA high-efficiency filtration system combined with the unique air duct circulation design can continuously filter pollutants (biological pollutants and suspended particles) in the cabinet, ensuring that the incubator can reach the ISO class 5 clean room within 5 minutes after the external door is closed, which is equivalent to the class 100 environment of the 209 E standard of the united states.

Optional Accessories

Name	Material Description
Oxygen Module	Zirconia O ₂ sensor, control accuracy: 0.1%; control range: 1-21% or 5-90%
3 Inner Door (for HCP-168/B)	Reduce the temperature, humidity and carbon dioxide concentration in the box after opening the door, and minimize the mutual influence of multiple cultures
6 Inner Door (for HCP-168/B)	Reduce the temperature, humidity and carbon dioxide concentration in the box after opening the door, and minimize the mutual influence of multiple cultures
8 Inner Door (for HCP-258/B)	Reduce the temperature, humidity and carbon dioxide concentration in the box after opening the door, and minimize the mutual influence of multiple cultures
Water Tray	Provides different bottom humidification methods
Roller Base	Easy to move, prevent the ground bacteria contamination
HEPA Filter	Ensure the cleanliness of the cabinet, suitable for users who open and close the door frequently; After opening the door for 30 seconds, the air inside the cabinet can be passed through HEPA filters within 5 minutes and reach ISO 5 clean room quality
Pressure Reducing Valve	Suitable for users with cylinder gas supply
Shelf	Increase the number of samples cultured 4 materials: SUS304 single mirror surface SUS304 double mirror surface tempering glass Pure copper
Humidity Display (for HCP-168/B)	Real time monitoring of humidity inside the box
Cylinder Switching	Supports switching between multiple steel cylinders to ensure uninterrupted air intake into the incubator
Electromagnetic Lock (HCP-168/B)	Important tests can be dedicated by dedicated personnel to ensure test safety
Stacking Bracket	Supports stacking of different volume models up and down, saving laboratory space
4-20mA	The analog acquisition interface for carbon dioxide and oxygen concentrations Multiple incubators can have the temperatures and carbon dioxide concentration data of all the incubators monitored at one computer terminal
Liner	SUS 304 SUS 316 Pure copper

Specifications

Model			HCP-80B	HCP-168B	HCP-258B
Type			Air Jacket		
Construction	Chamber Volume (L/Cu.Ft)		80/2.8	170/6.0	258/9.1
	Interior Chamber		304 Stainless Steel		
	Exterior Chamber		Cold-Rolled Steel Powder Coated		
	Access Port		/	42mm Diameter	35mm Diameter
	Data Outputs		Remote Alarm Contacts, USB		
Dimensions	Net/Gross Weight (approx)	kg	75/95	95/130	110/155
		lbs	165/209	209.4/286.6	243/341
	Interior Dimensions (W*D*H)	mm	400*420*490	490*560*650	570*610*745
		in	15.7*16.5*19.3	19.3*22*25.6	22.4*24.0*29.3
	Exterior Dimensions (W*D*H)	mm	625*684*735	714*812*887	794*867*985
		in	24.6*26.9*28.5	28.1*32*34.9	31.3*34.1*38.8
	Packing Dimensions (W*D*H)	mm	700*770*910	800*890*1050	870*950*1150
		in	27.6*30.3*35.8	31.5*35.0*41.3	34.2*37.4*45.3
Shelves	Dimensions (W*D)		380*300	473*434	550*484
	Number Standard/Maximum		3/8	3/11	3/13
	Max.Load Per Shelf/Total Load	kg	15/45		
	Construction		Perforated, Adjustable		
Electrical	Rated Voltage Power Supply (V/Hz)		115/60	115/60	115/60
	Nominal consumption (kw) (Steri-Run)		0.08 (0.75)	0.095 (1.1)	0.12 (1.2)
Control	Controller		Microprocessor		
	Display		7 "LCD Screen		
CO ₂	Control Accuracy		0.10%		
	Range		0-20%		
	Alarm Range		±0.5%		
	Inlet Pressure		12-17Psi (0.8-1.2 Bar)		
	Gas Purity		min.99.5% or Medical Quality		
	CO ₂ Inlet		1/8" Hose (Barbed)		
	Sensor		IR		
	Recovery Time ** (after 30s door opening ,98% from initial value) Min		4		
Alarms	CO ₂ Inlet Filter (µm)		<0.2		
	High/Low Temperature		Y		
	Remote Alarm		Y		
	Sensor Error		Y		
	Excessive CO ₂ Concentration		Y		
	Water Shortage Reminder		Y		
	Door Ajar		Y		
Temperature Parameter	Control Accuracy (°C)		0.1		
	Range		Ambient Temperature+3-55°C		
	Uniformity		±0.3		
	Ambient range (°C)		18-32		
	Temperature Fluctuations (°C)		±0.1		
	Sensor		2*PT1000		
	Recovery time *** (after 30s door opening ,98% from initial value) Min		4		
Sterilization Cycle	Cycle Temperature		180°C Dry-Heat Sterilization		
	Cycle Duration		Under 12 Hours		
Humidity	RH		93% ± 3% @ 37°C		
	Humidity Reservoir		Max.1.75L/Min 0.5L	Max.3.5L/Min 0.5L	Max.5.5L/Min 0.5L
Option	HEPA Filter		Y	Y	Y
	Pressure Reducing Valve		Y	Y	Y
	4-20mA		Y	Y	Y
	The Cylinder Switch		Y	Y	Y
	Shelf		Y	Y	Y
	Water Tray		Y	Y	Y
	3 Inner Door		N	Y	N
	6 Inner Door		N	Y	N
	8 Inner Door		N	N	Y
	Roller Base		Y	Y	Y
	Pure Copper Inner Liner		Y	Y	Y
	Pure Copper Shelf		Y	Y	Y
	Humidity Display		N	Y	N
	Oxygen Module		Y	Y	Y
Others	Electromagnetic Lock		N	Y	N
	Heightening Stand		Y	Y	Y
	Certification		UL	UL	UL

*Haier Biomedical reserves the right to change products and specifications without prior notice.

** For CO₂ not exceeding 5.2%

*** For temperature not exceeding 37°C