

The Haier Biomedical -25°C biomedical freezer maximises storage space. Integrated cold shelf and evaporator design provides maximum refrigeration efficiency.




DW-25L92/262

Key Features

- Chemically stable, HC commercially available and environmentally safe refrigerant
- High density foam insulation for rigidity and stable storage temperature
- Microprocessor control, digital display, adjustable temperature range: -10°C~-25°C
- LED digital display for clear observation
- Wide voltage tolerance design with applicable voltage range of 187~242 V/AC

Safety

- Multiple malfunction alarms including high low temperature, sensor error
- Two types of alarm indications: audible buzzing and visible flashing light
- Door lock for storage safety
- Storage drawer

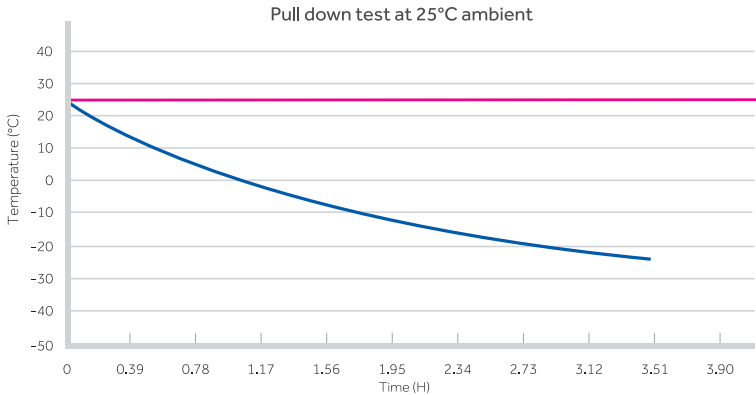

Specifications

Model		DW-25L92		DW-25L262	
Technical Data	Cabinet Type	Upright		Upright	
	Climate Class	SN N		SN N	
	Cooling Type	Direct Cooling		Direct Cooling	
	Defrost Mode	Manual		Manual	
	Refrigerant	HC		HC	
	Sound level ((dB(A))	27	28	34	34
Performance	Cooling Performance (°C)	-25		-25	
	Temperature Range (°C)	-10~-25		-10~-25	
Control	Controller	Microprocessor		Microprocessor	
	Display	LCD		LCD	
Electrical Data	Power Supply (V/Hz)	220-240/50	115/60	220-240/50	115/60
	Power (W)	255	125	270	135
	Electrical Current (A)	1.2	1.8	1.4	2.6
	Power Consumption (kWh/24h)	0.65	0.49	0.95	0.73
Construction	Capacity (L/Cu.Ft)	92/3.2		262/9.3	
	Net/Gross Weight (appox)	kg	46/51	88/93	
		lbs	101.4/112.4	194.0/205.0	
	Interior Dimensions (W*D*H)	mm	435*410*635	480*465*1430	
		in	17.1*16.1*25.0	18.9*18.3*56.3	
	Exterior Dimensions (W*D*H)	mm	640*610*810	700*705*1665	700*705*1730
		in	25.2*24.0*31.9	27.6*27.8*65.6	27.6*27.8*68.1
Loading Quantities	Packing Dimensions (W*D*H)	mm	660*700*900	775*760*1880	775*760*1890
		in	26.0*27.6*35.4	30.5*29.9*74.0	30.5*29.9*74.4
Alarms	Container Load (20'/40'/40'H)	48/108/108		21/45/45	
	High/Low Temp	Y		Y	
	Sensor Error	Y		Y	
	Door Ajar	Y		Y	
Accessories	Remote Alarm	Y		Y	
	Caster	Y		Y	
	Foot	Y		Y	
	Porthole	Y		Y	
	Drawers	3		7	
	USB Interface	Optional	/	Optional	/
	RS485	Optional		Optional	
Certifications	CE	Y	/	Y	/
	UL	/	Y	/	Y

Product appearance and specifications are subject to change with out notice