



PRODUCT BROCHURE · HAIER BIOMEDICAL

LLS Haier Combined Refrigerator and Freezer HYCD 469A

2 models inside · Cold Storage · Refrigerators



QUICK VIEW — SERIES AT A GLANCE

2 models in this document from Haier Biomedical. Full specifications inside.

MODELS IN THIS DOCUMENT

HYCD-319A · HYCD-469A

SOURCING

Authorized U.S. distributor

Distributed by Legacy Lab Supplies

legacylabsupplies.com · (855) 746-7557 / 855-SHOP-LLS · quotes in 24 hours





Combined Refrigerator and Freezer Unit



HYCD-469A

Scope of Application

This product is designed to store biomaterials, vaccines, electronic devices and low temperature tests of special materials, in hospitals, epidemic prevention stations, universities, scientific research institutes, electronic chemical industry and other enterprise laboratories.

Innovative Design

- Intelligent Microprocessor with Digital Display
- Audible and Visual Alert with Remote Alarm Contact
- Natural Hydrocarbon Refrigerant
- Self-closing Door with Magnetic Gasket
- Stainless Steel Interior
- Padlock to Secure Safe Storage

Qingdao Haier Biomedical Co.,Ltd.

No.280 Feng Yuan Road, High-tech Zone,
Qingdao, 266109, P.R. China
E-mail: inquiry@haierbiomedical.com
Website: www.haiermedical.com



Haier Biomedical
International



Haier Biomedical
International



@haiermedicalint



Haier Biomedical
International



Haier Biomedical
International

Product Advantages

Legacy Lab Supplies



Multipurpose and Space Efficient

- One cabinet with two independent chambers, both are self-contained and independently controlled with individual doors
- Refrigerator chamber is equipped with a double-paned glass viewing window and LED interior lighting



Microprocessor Controller with Digital Display

- Refrigerator temperature 2~8°C with resolution of 0.1°C
- Freezer temperature -40~-10°C with resolution of 1°C
- Multiple alarm functions with remote alarm contact to ensure safe monitoring



Environment Friendly

Hydrocarbon refrigerant (R600a for refrigerator / R290 for freezer) and CFC-free polyurethane insulation for reduced global warming potential



High Performance

- Refrigerator: Forced-air cooling system with cycle defrost, temperature uniformity $\pm 3^{\circ}\text{C}$
- Freezer: Cold wall cooling system, manual defrost, temperature uniformity $\pm 5^{\circ}\text{C}$
- Standard USB port & optional printer, easy to get temperature record




Stainless Steel Interior

The interior of refrigerator and freezer are both made of stainless steel, which is easy to clean and corrosion-proof


Ergonomic Design



Equipped with padlocks in both refrigerator and freezer to ensure storage safety



Equipped with electrically heated glass to prevent condensation effectively



Two test holes for both refrigerator and freezer as standard, allow independent testing of cabinet temperature




Refrigerator and freezer are equipped with self-closing hinges to avoid door ajar (less than 90° self-closing)

Combined Refrigerator and Freezer Unit

Product Parts



Legacy Lab Supplies

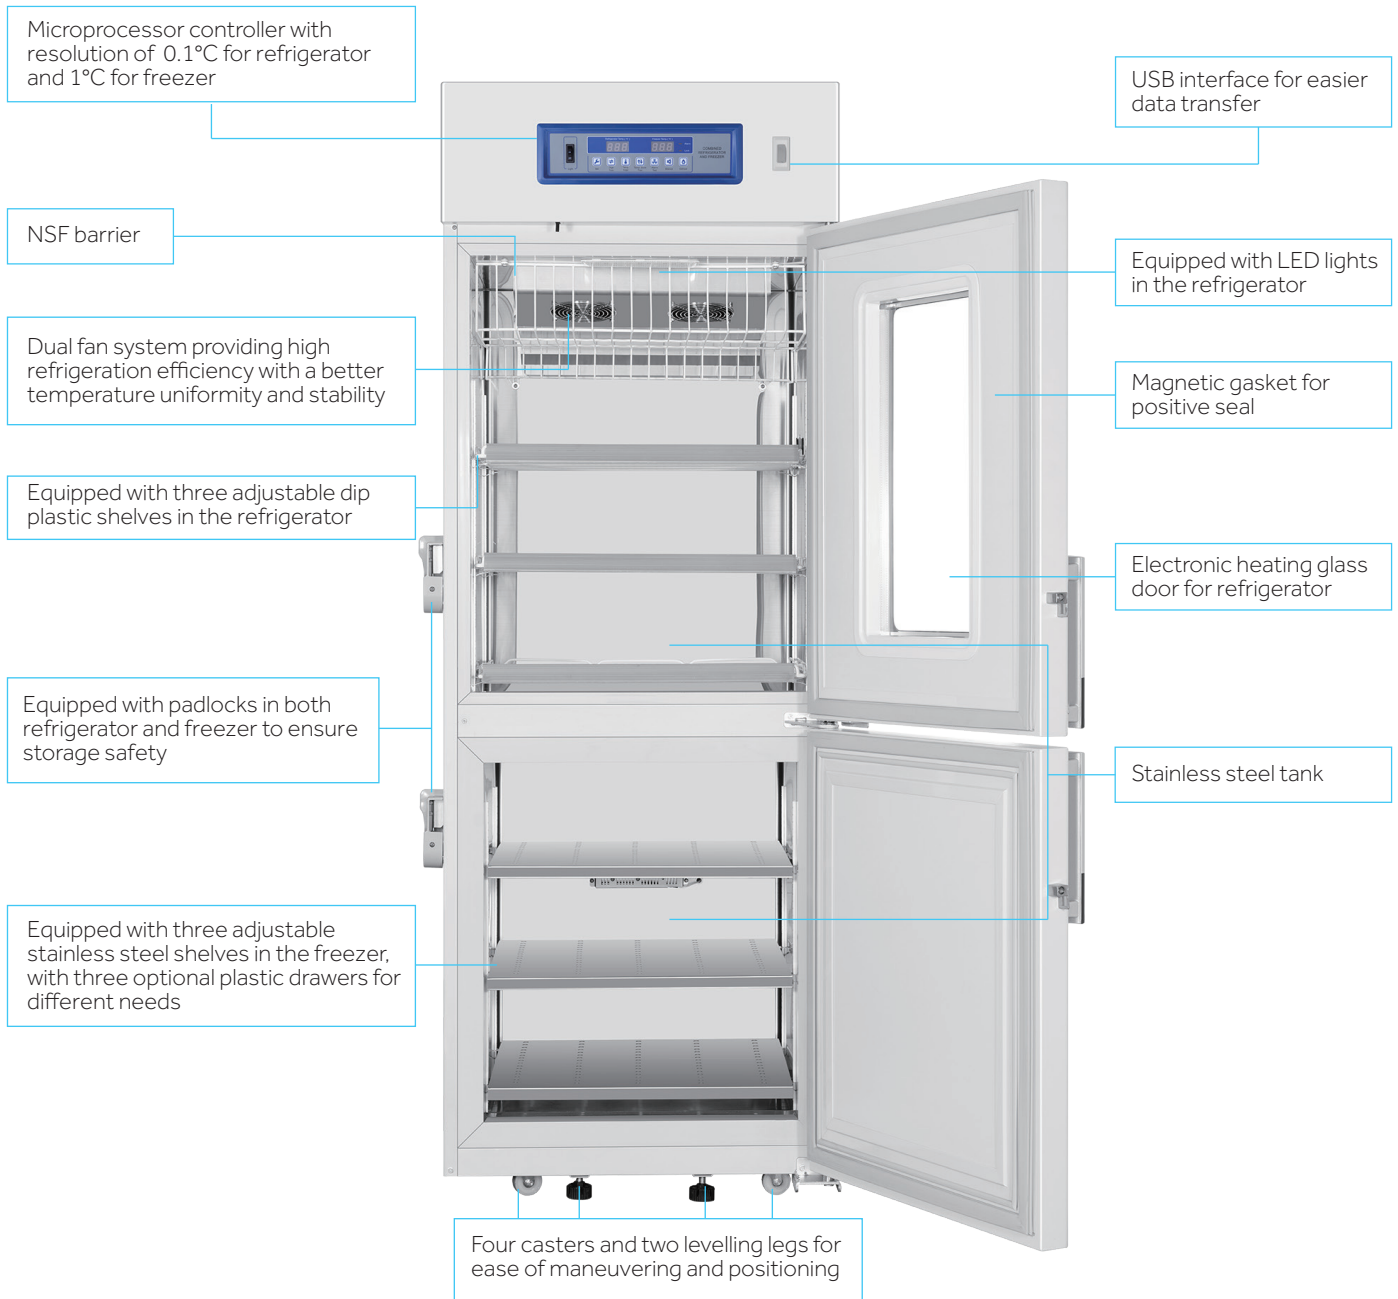


32°C Ambient Temperature Curve


Legacy Lab Supplies




Refrigerator Cool Down Curve

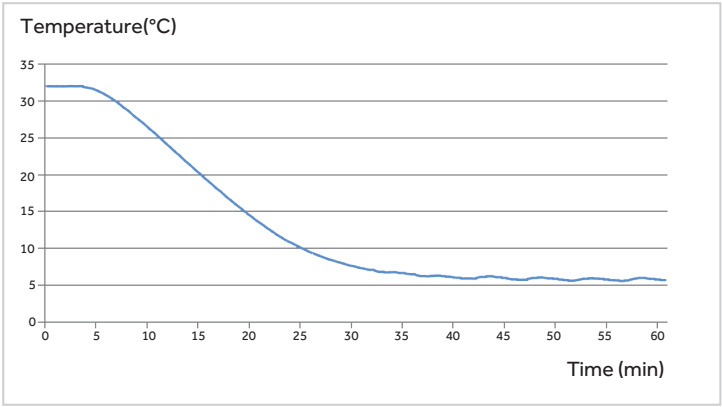


Freezer Cool Down Curve

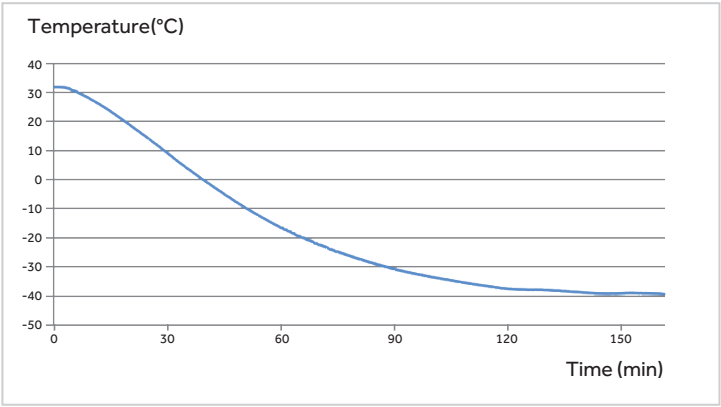


Refrigerator Stability Curve

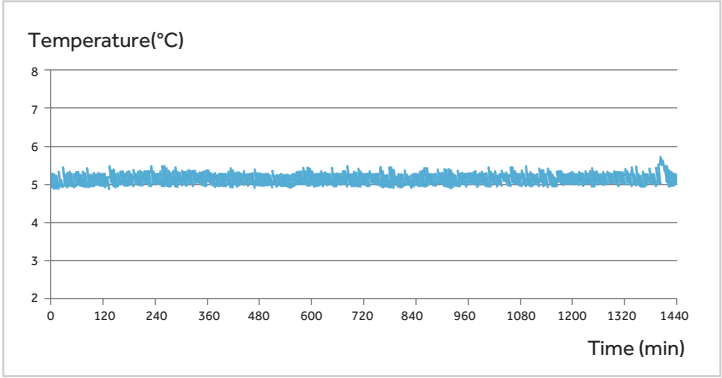

Freezer Stability Curve

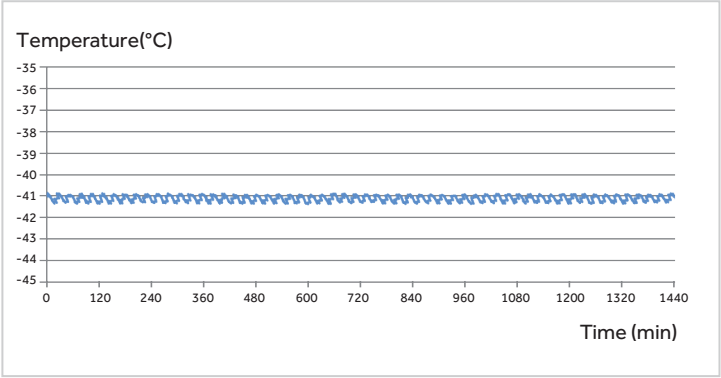

Dimensions

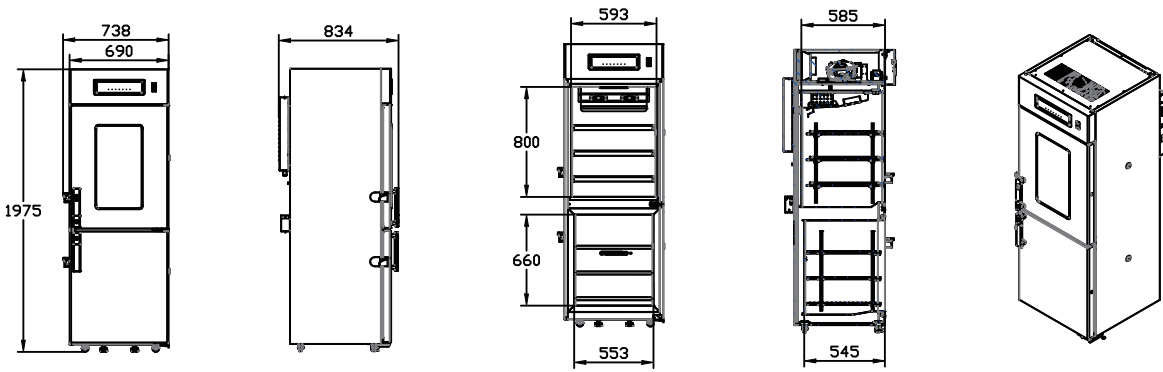



Model			HYCD-469A (115V)	
Technical Data	Cabinet Type		Upright	
	Climate Class		N (16~32°C)	
	Cooling Type		Refrigerator: Forced air cooling Freezer: Direct cooling	
	Defrost Mode		Refrigerator: Auto / Freezer: Manual	
	Refrigerant		Refrigerator: R600a/ Freezer: R290	
	Sound Level (dB(A))		52	
Performance	Temperature Range (°C)		Refrigerator: 2~8 / Freezer: -15~-40	
Control	Controller		Microprocessor	
	Display		LED	
Electrical Data	Power Supply (V/Hz)		115/60	
	Electrical Current (A)		7	
Dimensions	Capacity (L/Cu.Ft)		Refrigerator: 245/8.65; Freezer: 200/7.1	
	Net/Gross Weight (approx)	kg	176/207	
		lbs	388.0/456.4	
	Interior Dimensions (W*D*H)	mm	Refrigerator: 593*585*800 Freezer: 553*545*660	
		in	Refrigerator: 23.3*23.0*31.5 Freezer: 21.8*21.5*26.0	
	Exterior Dimensions (W*D*H)	mm	738*834*1975	
		in	29.1*32.8*77.8	
	Packing Dimensions (W*D*H)	mm	840*910*2170	
		in	33.1*35.8*85.4	
Container Load (20'/40'/40'H)		12/28/28		
Alarms	High/Low Temperature		Y	
	Sensor Error		Y	
	Power Failure		Y	
	Door Ajar		Y	
	Remote Alarm		Y	
	High Ambient Temperature		Y	
	Low Battery		Y	
Accessories	Caster		Y	
	Foot		Y	
	Porthole		Y	
	Shelves/Drawers		Refrigerator: 3/0 Freezer: 3/0 (Max 3 Drawers optional, without sliding rack)	
	Stylus printer/RS485		Optional (printer or RS485, either-or)	
	USB Interface		Y	
Others	Certification		UL	

Product appearance and specifications are subject to change without notice