



PRODUCT BROCHURE · HAIER BIOMEDICAL

Haier HYC-290 Pharmacy Refrigerator , Glass Door, 115V

SKU HYC-290 · Cold Storage · Pharmacy Refrigerators



QUICK VIEW

The Haier HYC-290 is a 290 L (10.2 cu ft) upright pharmacy refrigerator with a double-layer tempered glass door, holding the pharmacy-grade +2~8°C

SOURCING

**Authorized U.S.
distributor**

Distributed by Legacy Lab Supplies

legacylabsupplies.com · (855) 746-7557 / 855-SHOP-LLS · quotes in 24 hours






Legacy Lab Supplies

Pharmacy Refrigerator

HYC-290

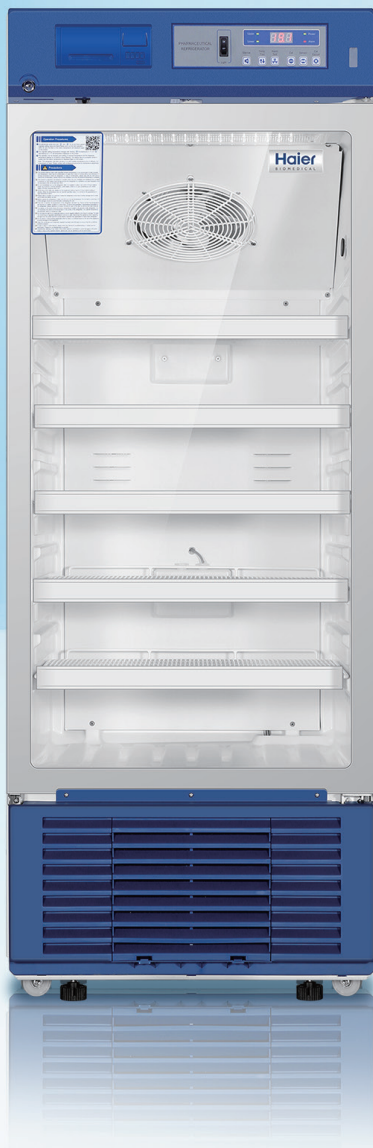

Frequency Conversion Energy Saving

Variable frequency compressor with optimized cooling system, which is more energy efficient.



Environmentally Friendly

Hydrocarbon compressor and refrigerant, which does not contain any fluorine or chlorine, making it environmentally friendly.



Large Space, Superior Uniformity

Interior space is efficiently utilized for large amounts of storage with excellent temperature uniformity of $\pm 3^{\circ}\text{C}$.



Low Noise

Optimized system and noise reduction design to reduce sound levels in your lab at 43dB(A).



Stable performance, multiple alarm modes

Six different types of alarms that are audible and visible.



Microprocessor Control System



Self Closing Door with 90° Stay Open Feature



Precise Temperature Control



Security lock



Standard USB Interface

Haier Biomedical USA

Website: www.haiermedical-usa.com



Haier Biomedical
International



Haier Biomedical
International



@haiermedicalint



Haier Biomedical
International



Haier Biomedical
International



Scope of Application



This product is suitable for pharmacies, pharmaceutical manufacturers, research laboratories, medical centers and hospitals, and are used to store vaccines, patient samples, various biological products and any items that need to be stored in the 2~8°C temperature range.

Specifications



HYC-290

Technical Data

Cabinet Type	Upright, glass door
Uniformity	±3°C
Cooling Type	Forced air cooling
Defrost Mode	Auto
Refrigerant	HC
Noise (dB (A))	43

Performance

Temp Range(°C)	2~8
----------------	-----

Control

Controller	Microprocessor
Display	LED

Electrical Data

Power Supply (V/Hz)	115/60
Power (W)	200
Electrical Current (A)	2.2

Dimensions

Capacity (L/Cu.Ft)	290/10.2	
Net/Gross Weight (approx)	(kg)	105/127
	(lbs)	231.6/280.1
Interior Dimension (W*D*H)	(mm)	530 x 555 x 1080
	(in)	20.9 x 21.9 x 42.5
Exterior Dimension (W*D*H)	(mm)	665 x 710 x 1665
	(in)	26.2 x 28.0 x 65.6
Packing Dimension (W*D*H)	(mm)	690 x 790 x 1810
	(in)	27.1 x 31.0 x 71.1
Container Load (20'/40'/40'H)	22/44/44	



Accessories

Casters	Y
Leveling Feet	Y
Porthole	Y
Shelves	5
USB Interface	Y

Alarms

High/Low Temp	Y
Remote System	Y
Power Failure	Y
Sensor Error	Y
Low Battery	Y
Door Ajar	Y

Other

Certification	UL
---------------	----