



PRODUCT BROCHURE · HAIER BIOMEDICAL

Haier HYC-639 Pharmacy Refrigerator , Glass Door, 115V ENERGY STAR

SKU HYC-639 · Cold Storage · Pharmacy Refrigerators



QUICK VIEW

The Haier HYC-639 is a high-capacity 639 L (22.5 cu ft) upright pharmacy refrigerator with a tempered glass door, holding the pharmacy-grade +2~8°C

SOURCING

**Authorized U.S.
distributor**

Distributed by Legacy Lab Supplies

legacylabsupplies.com · (855) 746-7557 / 855-SHOP-LLS · quotes in 24 hours





Legacy Lab Supplies



HYC-639

Pharmacy Refrigerator

Scope of Application :

Designed for clinical and pharmaceutical use, applications include pharmacy, pharmaceutical production and supply chain, public health, hospital and primary care. Suitable for storage of biological products, pharmaceuticals, medicine and vaccines at a temperature between 2-8°C.

Innovative Design

- Energy efficient
- Multiple alarms
- Safe and reliable
- Excellent temperature uniformity
- Quiet

Qingdao Haier Biomedical Co.,Ltd.

No.280 Feng Yuan Road, High-tech Zone,
Qingdao, 266109, P.R. China
E-mail: inquiry@haierbiomedical.com
Website: www.haiermedical.com



Haier Biomedical
International



Haier Biomedical
International



@haiermedicalint



Haier Biomedical
International



Haier Biomedical
International

Product Advantages

Legacy Lab Supplies



Energy Saving

Features include 70mm thick foam layer and optimized refrigeration system which reduces power consumption.



Environmentally-friendly

HC refrigerants do not contain chloride or fluoride and have a GWP of just 3. CFC-Free insulation meets European ROHS directives for additional environmental protection.



Excellent Temperature Uniformity

Designed with finned evaporator and double fan system for forced air cooling to provide a uniform temperature of $\pm 2^{\circ}\text{C}$.




Multiple Alarm for Safe and Reliable Operation


Equipped with upper display sensor, lower display sensor, defrosting sensor, control sensor, ambient temperature sensor, hot condenser sensor.

Typical Performance Characteristics in 32°C Ambient Temp.

Cool down curve

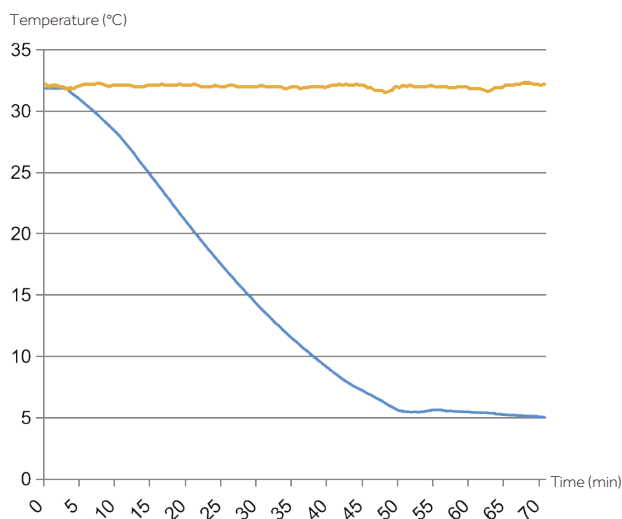

Stability curve

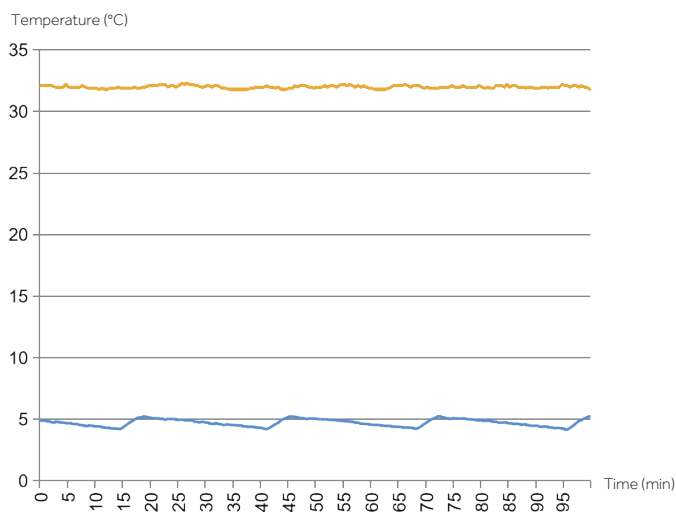

— Internal Temperature
— Ambient Temperature

Product Details

Legacy Lab Supplies



- **Microprocessor control system**

Microprocessor electronic temperature controller, LED temperature display, display precision is 0.1°C

- **Porthole**

Standard equipped with a porthole, convenient for users to test or insert probes for remote monitoring

- **Temperature records for compliance**

Standard USB
Optional printer, RS485 interface, etc

- **Casters and leveling leg design**

Standard with 4 universal casters and 2 height adjustable feet to ensure ease of movement and stability

- **Thermally efficient insulation**

70mm thick foam layer to reduce energy consumption and improve cabinet performance

- **Security lock**

Equipped with safety lock with 2 keys to prevent unauthorized access to ensure product safety

- **Cabinet construction**

The liner is sprayed steel plate for easy cleaning

- **Internal configuration**


Supplied as standard with 4 shelves



*Optional: stainless steel liner, printer, RS485 interface.



Product Dimension Drawings

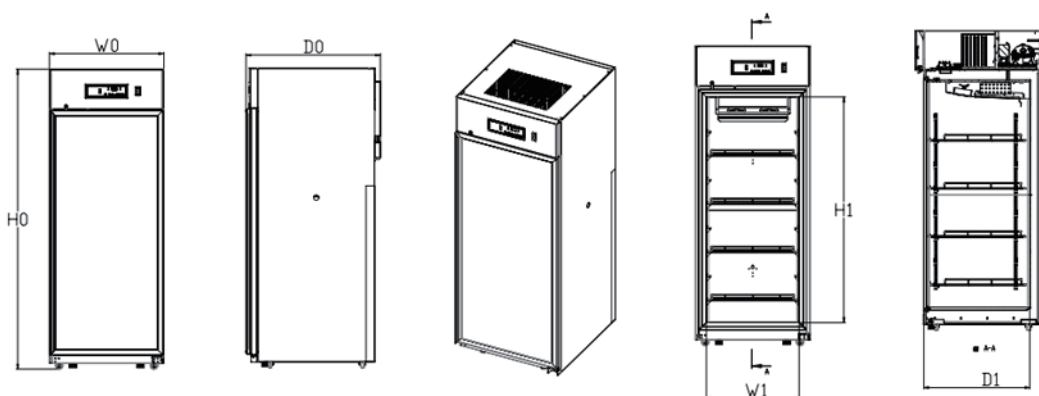

W0-Total Width
W1-Inner Width
D0-Total Depth
D1-Inner Depth
H0-Total Height
H1-Inner Height

W0	W1	D0	D1	H0	H1
760	620	897	706	1993	1520

Specifications



Legacy Lab Supplies



Model			HYC-639	
Technical Data	Cabinet type		Upright, Single Door	
	Climate class		ST	
	Cooling type		Forced Air Cooling	
	Defrost mode		Auto	
	Refrigerant		HC	
	Sound level (dB(A))		43	46
Performance	Temperature range (°C)		2~8	
Control	Controller		Microprocessor	
	Display		LED	
Electrical Data	Power supply (V/Hz)		220~240/50	115/60
	Electrical current (A)		2.15	2.5
Dimensions	Capacity (L/Cu.Ft)		639/22.6	600/21.2
	Net/Gross weight (approx)	kg	200/240	
		lbs	551.15/639.33	
	Interior dimensions (W*D*H)	mm	620*706*1520	
		in	24.4*27.8*59.8	
	Exterior dimensions (W*D*H)	mm	760*897*1993	
		in	29.9*35.3*78.5	
	Packing dimensions (W*D*H)	mm	910*1030*2170	
		in	35.8*40.6*85.4	
Alarms	Container load (20'/40'/40'H)		12/24/24	
	High/Low temperature		Y	
	High ambient temperature		Y	
	Door Ajar		Y	
	Power failure		Y	
	Low battery		Y	
	Sensor error		Y	
	Communication failure		Y	
	Condenser heat		Y	
	Remote alarm		Y	
Accessories	Caster		Y/4	
	Foot		Y/2	
	Porthole		Y	
	Shelves/Drawers		4/-	
	Printer		Optional	
	USB interface		Y	
Others	Certification		CE, UKCA	UL, Energy Star, ANSI 456

*Haier Biomedical reserves the right to change products and specifications without prior notice.